

# Made to Order Common Specifications: -XC78: Auto Switch Mounting Special Dimensions at Stroke End



## 56 Auto Switch Mounting Special Dimensions at Stroke End

Symbol  
**-XC78**

Auto switch mounting position at stroke end is assembled like below.

### Applicable Series

Series	Description	Model	Action	Note	Vol. no. (for std model)
MGC	Guide cylinder	MGC	Double acting		Web Catalog

### How to Order

MGC  Standard model no. **-XC78**


Auto switch mounting special dimensions at stroke end

### Specifications


Applicable series	MGC
Bore size (mm)	20, 25, 32, 40, 50
Applicable cylinder	Guide cylinder
Specifications other than above	Same as standard type

### Dimensions (Dimensions other than below are the same as standard type.)


D-M9□(V)/M9□(V)/M9□A(V)  
D-A9□(V)

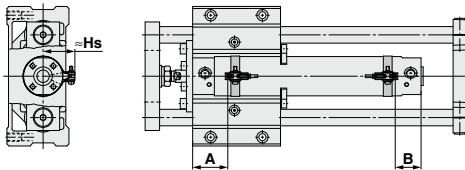


D-B5/B6  
D-G5/K5

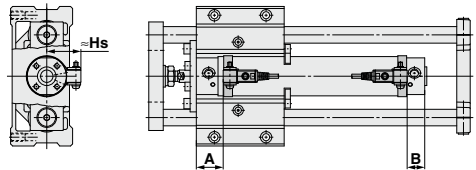

D-C7/C8  
D-H7

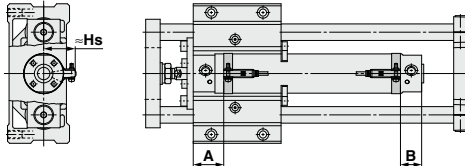

D-B7/B8  
D-G7/K7

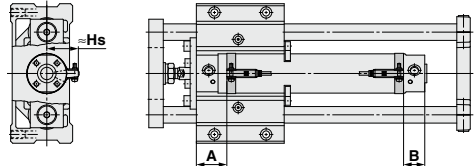

### Proper Auto Switch Mounting Position

Auto switch model	(mm)															
	D-M9□(V) D-M9□W(V) D-M9□A(V)		D-A9□(V)		D-B7/B8 D-B73C D-B80C D-G7/K7 D-K79C		D-C7□ D-C80 D-C73C D-C80C		D-B5□ D-B64		D-B59W		D-H7□ D-H7C D-H7NF D-H7□W D-H7BA		D-G59□G5 D-K59 D-G5W D-K59W D-G5NT D-G5BA	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
20	33	24 (32)	29	20 (28)	30.5	21.5 (29.5)	29.5	20.5 (28.5)	23.5	15.5 (22.5)	26.5	17.5 (25.5)	28.5	19.5 (27.5)	25	16 (24)
25	33	24 (32)	29	20 (28)	30.5	21.5 (29.5)	29.5	20.5 (28.5)	23.5	15.5 (22.5)	26.5	17.5 (25.5)	28.5	19.5 (27.5)	25	16 (24)
32	34	25 (33)	30	21 (29)	31.5	22.5 (30.5)	30.5	21.5 (29.5)	24.5	15.5 (23.5)	27.5	18.5 (26.5)	29.5	20.5 (28.5)	26	17 (25)
40	39	27 (36)	35	23 (32)	36.5	24.5 (33.5)	35.5	23.5 (32.5)	29.5	19 (26.5)	32	20.5 (29.5)	34.5	22.5 (31.5)	31	19 (28)
50	46	32 (36)	42	28 (40)	43.5	29.5 (41.5)	42.5	28.5 (40.5)	36.5	22.5 (34.5)	39.5	25.5 (37.5)	41.5	27.5 (39.5)	38	24 (36)

### Proper Auto Switch Mounting Height

Auto switch model	(mm)					
	D-M9□(V) D-M9□W(V) D-A9□(V)		D-C7□/C80 D-H7□ D-H7NF D-H7BA	D-C73C D-C80C	D-B7□/B80 D-B73C D-B80C D-G79/K79 D-H7C D-G5NT D-G5BA D-G59F	D-G5□/K59 D-G5□W D-K59W D-B5□/B64 D-B59W D-G5BA D-G59F
	Hs	Hs	Hs	Hs		
20	25	24.5	27	27.5		
25	27.5	27	29.5	30		
32	31	30.5	33	33.5		
40	35.5	35	37.5	38		
50	41	40.5	43	43.5		

\* ( ) : Long stroke, double rod

Note) Adjust the auto switch after confirming the operating conditions in the actual setting.